


versatile™ 4C Mailbox, ADA Max Height Suite

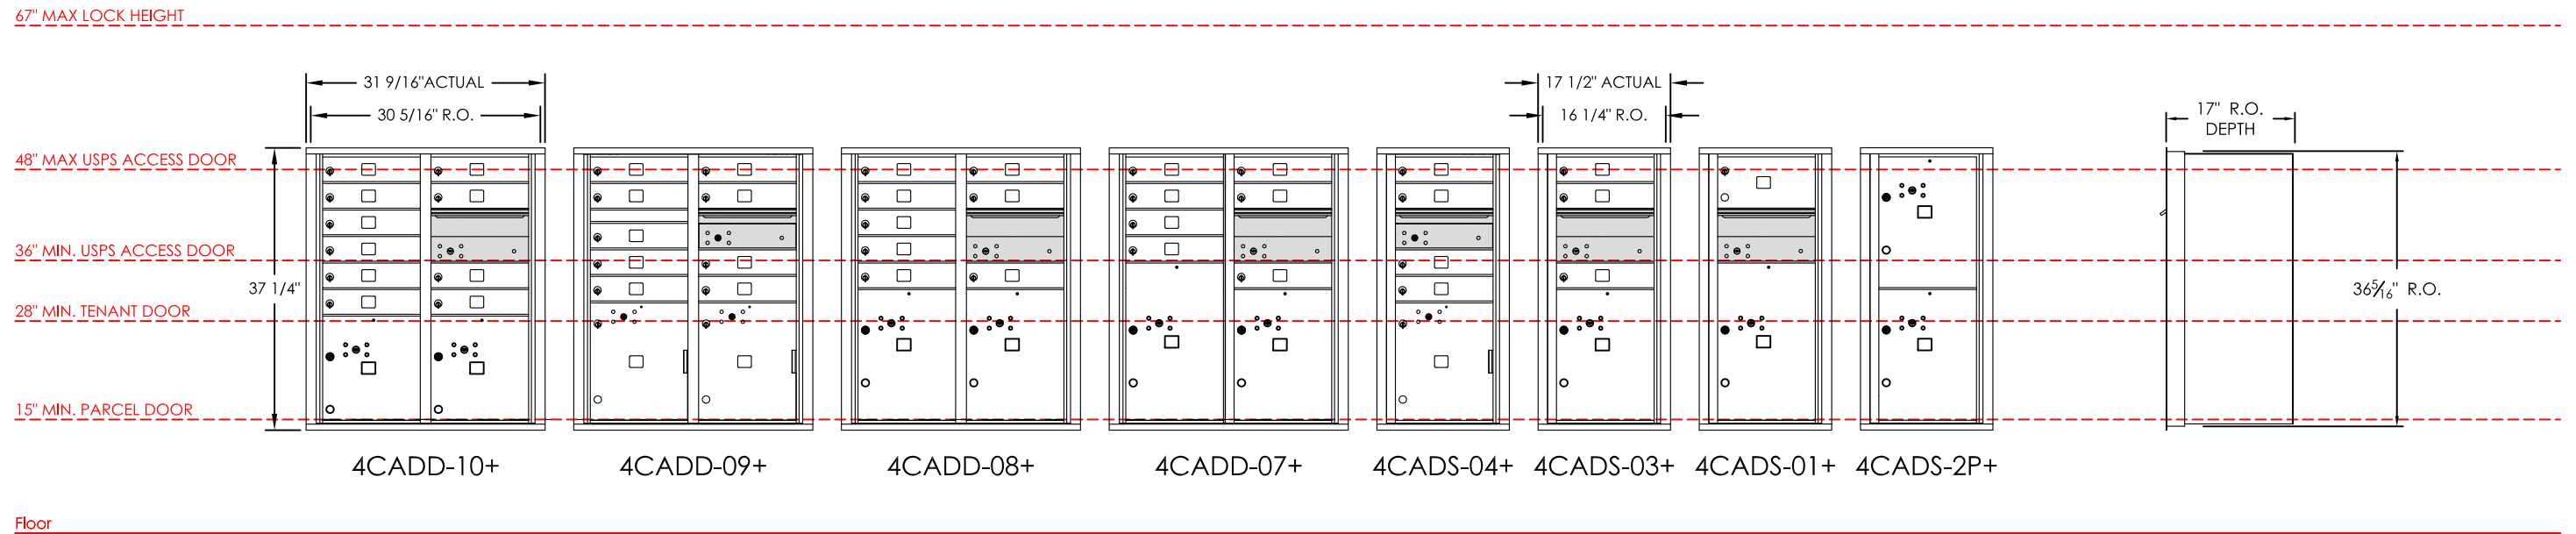

NOTES:

1. Below are the USPS STD-4C installation guidelines:

- At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
- No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
- No patron (tenant) lock shall be positioned more than 67" AFF.
- No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
- The USPS Arrow lock shall be positioned 36" - 48" AFF.

2. Modules noted with + meet Fair Housing ADA installation requirements.

PRODUCT SERIES: versatile™ 4C Mailbox ADA Max Height Suite

AF FLORENCE
manufacturing company
5935 Corporate Drive • Manhattan, KS 66503
www.florencemailboxes.com • (800) 275-1747
A GIBRALTAR INDUSTRIES COMPANY

MODEL	4CADA	REV	
SCALE	NONE	LAST REV DATE	5/15/2014
DRAWING NUMBER	4CADACS	DRAWN BY	AFD
		SHEET	1 OF 1